



No. 168 Bulldozer

A New Tool Designed for Earthmaster Tractors Model C & CH

The new Earthmaster Bulldozer adds many new jobs to the usefulness of Earthmaster tractors. Grading, scraping, dirt moving and many other operations can be handled with ease and dispatch. The husky 72" blade can move approximately one-half yard of dirt. Hydraulic lift raises and lowers blade, controlling cut to desired depth and quick angling adjustment permits operator to set blade up to 20° angle right or left. Blade can also be offset 7½" either side when required, to fill in ditches or for other work requiring this adjustment.

Unit can be quickly mounted or removed from tractor. No holes to drill or special tools required. Push bar assembly, as illustrated, attached to drop housings where regular drawbar is mounted. Brackets bolted to frame carry a sturdy counter shaft with bell cranks directly above each push

bar. This design holds blade firmly at desired depth and operates raising and lowering action using one standard #55838 cylinder furnished with tractor hydraulic system.

The 72" blade is shaped from ¾" plow steel. Both edges are sharpened so blade can be reversed, giving double service. All studs attaching blade to bearing plate are flathead and counter sunk so blade will scour clean.

The bearing plate is of ½" steel—17" x 20", giving blade solid support and large bearing surface. This is very essential for good work and long hard service.

The Earthmaster Bulldozer is a well designed tool, built to do excellent work. Materials used are the best available. It will fully meet the requirements of farm use and give long satisfactory service.

No. 165 — Scraper Attachment

Outstanding performance at low cost, field leveling, leveling along new borders, filling in low spots, cleaning stables, dairy yards and feeding corrals are a few of the jobs this new Earthmaster tool handles with ease. Mounted on the standard No. 160 or 163 Hitch Frames—full hydraulic control gives operator quick positive adjustment as to cutting depth, smooth even distribution of dirt moved. Turns can be made with minimum spill as dividing baffle plates prevent dirt overloading

either end enclosures.

Substantial, all steel welded construction assures long life and ability to withstand hard service. Has quick detach assembly feature making scraper ready for service whenever desired. Bucket is five feet wide and adjustable as to pitch. All Earthmaster tractor owners will find this scraper practical and efficient on the wide variety of work for which it is adapted.

Fifty-Six Integrated Matched Implement Combinations


PRINTED IN U.S.A.

Earthmaster Division:
Turner Mfg. Co., Statesville, N. C.




Earthmaster
FOR THE BEST IN EARTH

Earthmaster FOR THE BEST IN EARTH

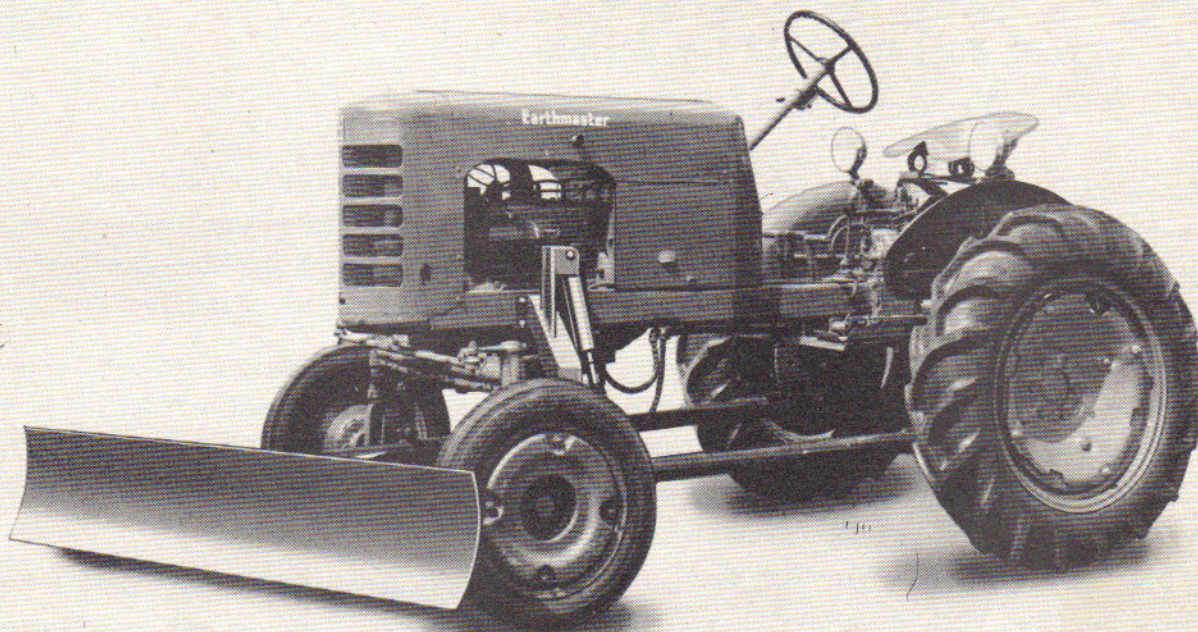

Earthmaster Bulldozer No. 168
72" Blade — 20° Angling adjustment — Hydraulic depth control

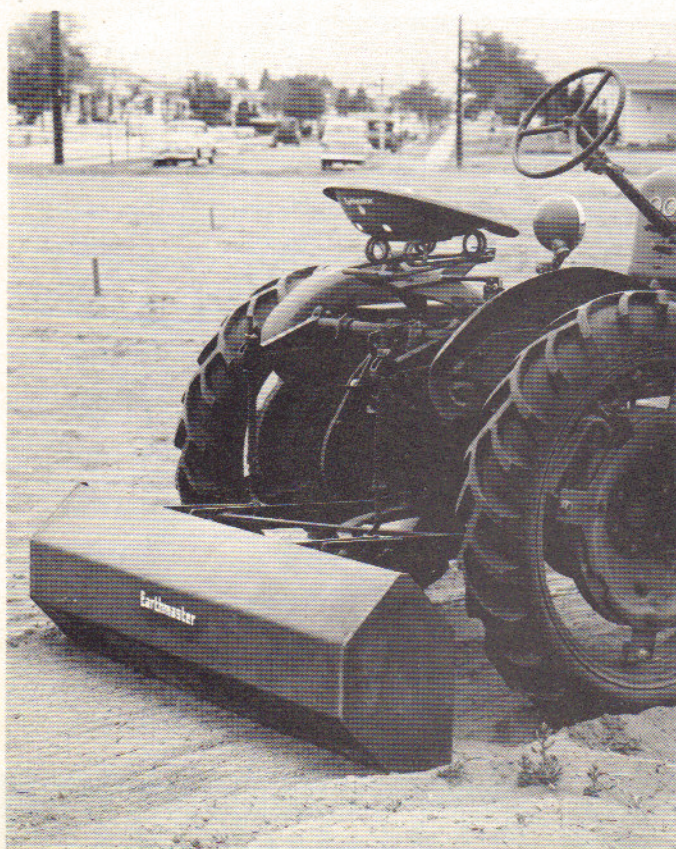

Earthmaster Scraper No. 165 — 5 feet wide — Hydraulic depth control